



(11) **EP 0 715 971 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
12.06.1996 Bulletin 1996/24

(51) Int Cl.⁶: **B60C 9/22, B60C 9/20**

(21) Application number: **95307153.7**

(22) Date of filing: **10.10.1995**

(84) Designated Contracting States:
DE ES FR GB IT

(30) Priority: **09.12.1994 JP 306242/94**
09.12.1994 JP 306243/94
23.03.1995 JP 63881/95
23.03.1995 JP 63882/95
25.09.1995 JP 245989/95

(71) Applicant: **Bridgestone Corporation**
Tokyo (JP)

(72) Inventors:
• **Kohno, Yoshihide**
Kodaira City, Tokyo (JP)

• **Yamanaka, Eiji**
Kodaira City, Tokyo (JP)
• **Kobayashi, Toshinobu**
Kodaira City, Tokyo (JP)
• **Sato, Takayuki**
Wako City, Saitama Pref. (JP)


(74) Representative: **Whalley, Kevin**
MARKS & CLERK,
57-60 Lincoln's Inn Fields
London WC2A 3LS (GB)

(54) **Pneumatic radial tires**

(57) A pneumatic radial tire (1) for passenger cars has good cornering property and either or both of durability and high-speed durability and comprises a circum-

ferential belt layer (7) in addition to a slant belt layer (6), in which specified PET, nylon, PEN or vinylon fiber cords or steel cords as particularly defined are used in the circumferential belt layer.

FIG. 1

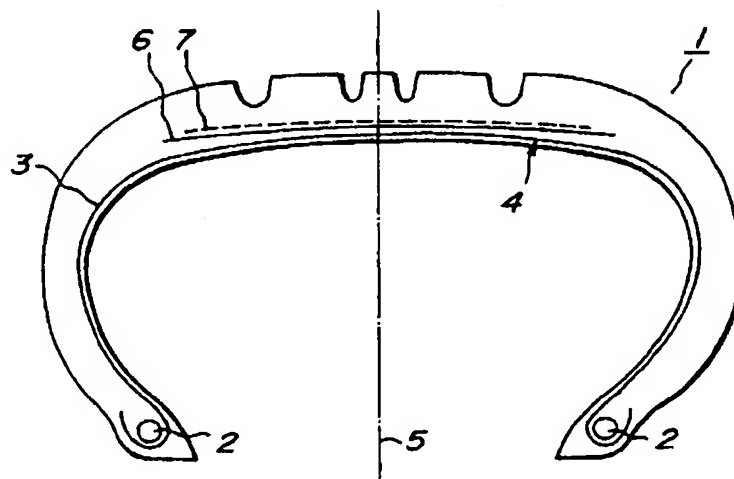

EP 0 715 971 A2

Description

This invention relates to a pneumatic radial tire having excellent cornering property and either or both of durability and high-speed durability, and more particularly to a pneumatic radial tire for use in general-purpose passenger cars mainly developed for weight reduction.

With the demand of energy saving, it is now attempted to improve the fuel consumption in automobiles by reducing the weight, and it tends to more raise the demand of weight reduction in tires accompanied therewith. Particularly, this tendency becomes conspicuous in pneumatic radial tires for use in general-purpose passenger cars.

In general, the pneumatic radial tire comprises so-called cross belt formed by laminating at least two slant belt layers on an outer periphery of a carcass crown portion so as to cross cords of these layers with each other. From a viewpoint of the tire weight reduction, there have been developed tires comprising a belt composed of a single slant belt layer and a circumferential belt layer(s) containing light-weight organic fiber cords arranged substantially in parallel to an equatorial plane of the tire. The tire of this type is disclosed in, for example, JP-A-62-152904 and JP-A-4-163212.

In the tires disclosed in these articles, organic fiber cords having a high tensile rigidity in the circumferential direction such as aromatic polyamide fiber cords (e.g. Kevlar cord) and the like are used as a cord in the circumferential belt layer. Further, there is disclosed that the circumferential belt layer can control the pushing out of the tread portion through centrifugal force during the high-speed running to improve the high-speed durability.

Moreover, organic fiber cords widely used as a cord for a carcass ply such as polyethylene terephthalate (hereinafter abbreviated as PET) fiber cord, nylon fiber cord, polyethylene naphthalate (hereinafter abbreviated as PEN) fiber cord and vinylon (PVA) fiber cord are considerably low in the tensile rigidity in the circumferential direction as compared with the aromatic polyamide fiber cord, so that they are hardly applied as a cord for the circumferential belt layer. And also, the use of steel cords for the circumferential belt layer is unfavorable from a viewpoint of the weight reduction and the like, so that steel cords are hardly used in the circumferential belt layer.

When the aromatic polyamide fiber cords are used in the circumferential belt layer, however, the resistance to compression fatigue is poor, so that it has been confirmed that the belt is apt to create compression breakage accompanied with buckling deformation of the belt generated during the severe cornering.

The inventors have made various studies with respect to the use of organic fiber cords in the circumferential belt layer and found that PET, nylon, PEN and vinylon fiber cords, which have never been used in the circumferential belt layer in the past, can be used in the circumferential belt layer by rationalizing the twisting structure, total denier and twist constant of such a cord, and also high-strength steel cords formed by rationalization of the twisting structure can be used in the circumferential belt layer without so increasing the tire weight.

It is, therefore, an object of the invention to provide pneumatic radial tires having excellent cornering property and either or both of durability and high-speed durability by using rationalized PET fiber cords, nylon fiber cords, PEN fiber cords, vinylon fiber cords or steel cords in the circumferential belt layer, particularly pneumatic radial tires for use in general-purpose passenger cars attaining the reduction of tire weight.

According to the invention, there is the provision of a pneumatic radial tire comprising a carcass toroidally extending between at least a pair of bead cores and a belt superimposed on a crown portion of the carcass and comprised of one slant belt layer containing a plurality of cords or filaments arranged at a given inclination angle with respect to an equatorial plane of the tire and at least one circumferential belt layer laminated on the slant belt layer and containing a plurality of cords arranged substantially in parallel to the equatorial plane, an improvement wherein the cord used in the circumferential belt layer is made from PET, nylon, PEN or vinylon fiber and has a layer twisting structure and a total denier D_T of 1000d-6000d and a twist constant N_t represented by $N_t = T \times (0.139 \times D_T/2 \times 1/p)^{1/2} \times 10^{-3}$ of not more than 0.3 in case of PET or nylon fiber, not less than 0.5 in case of PEN fiber, or not less than 0.6 in case of vinylon fiber, wherein T is a twisting number (twist turns/10 cm) and p is a specific gravity.

The term "layer twisting structure" used herein means that one or more fibers are twisted in a certain direction (cable twist) and two or more fibers are twisted in a direction opposite thereto (ply twist).

The term "total denier" used herein means a product of fiber denier and number of fibers to be twisted.

It is preferable that the cord for the circumferential belt layer has a loss tangent ($\tan \delta$) of not more than 0.3 under conditions that an initial tension is 1 kgf/cord, a strain amplitude is 0.1%, a frequency is 20 Hz and an atmosphere temperature is 25°C.

In case of more requiring the circumferential rigidity in the circumferential belt layer as compared with the case of using the PET, nylon, PEN or vinylon fiber cords, the cord in the circumferential belt layer is preferable to be a steel cord having a modulus of elasticity of not less than 3000 kgf/mm² and a twisting structure of $1 \times N$ or $1 + N$ in which N is the number of steel filaments.

In preferred embodiments of the invention, a coating rubber for the circumferential belt layer has a modulus of elasticity of not less than 200 kgf/mm², and the cord for the circumferential belt layer is spirally wound around the slant belt layer, and the slant belt layer contains steel cords or steel filaments therein, and the slant belt layer has a cord inclination angle of 15-45° with respect to the equatorial plane, and a gauge of rubber located between the cord of the

slant belt layer and the cord of an innermost circumferential belt layer in a radial direction of the tire is made larger in a side end region of the tire than in a central region thereof in the widthwise direction at a radial section of the tire and further a gauge of rubber located between the cord of an outermost circumferential belt layer in the radial direction and an inner periphery of a tread rubber is made larger in the central region of the tire than in the side end region thereof,
 5 and at least two circumferential belt layers are disposed in the central region in the widthwise direction of the tire, and at least two circumferential belt layers are disposed in the side end region in the widthwise direction of the tire.

Moreover, the modulus of elasticity of the coating rubber for the circumferential belt layer is calculated from a relationship between load and displacement by compactly filling a rubber specimen 9 in a cylindrical cavity of a steel jig 8 having a diameter d of 14 mm and a height h of 28 mm as shown in Fig. 7a, setting the jig 8 into a compression testing machine 10 as shown in Fig. 7b and applying a load W onto upper and bottom faces of the rubber specimen 9
 10 at a rate of 0.6 mm/min to measure a displacement by means of a laser displacement meter 11.

The invention will be described with reference to the accompanying drawings, wherein:

Fig. 1 is a diagrammatically sectional view of a first embodiment of the pneumatic radial tire according to the invention;

Fig. 2 is a diagrammatically sectional view of a second embodiment of the pneumatic radial tire according to the invention;

Fig. 3 is a diagrammatical view illustrating a gauge t_1 of rubber located between cord of a slant belt layer 6 and cord of an innermost circumferential belt layer 7 in the radial direction of the tire;

Fig. 4 is a diagrammatical view illustrating a gauge t_2 of rubber located between cord of an outermost circumferential belt layer in the radial direction of the tire and an inner peripheral face of a tread rubber;

Fig. 5 is a diagrammatically sectional view of a third embodiment of the pneumatic radial tire according to the invention;

Fig. 6 is a diagrammatically sectional view of a fourth embodiment of the pneumatic radial tire according to the invention; and

Figs. 7a and 7b are diagrammatical views illustrating a method for measuring a modulus of elasticity of a coating rubber for a circumferential belt layer.

In Fig. 1 is diagrammatically shown a radial section of a first embodiment of the pneumatic radial tire according to the invention, in which numeral 1 is a pneumatic radial tire, numeral 2 a bead core, numeral 3 a carcass, numeral 4 a crown portion of the carcass, numeral 5 an equatorial plane of the tire, numeral 6 a slant belt layer, and numeral 7 a circumferential belt layer.

In this tire 1, the slant belt layer 6 containing a plurality of cords or filaments arranged at a certain inclination angle with respect to the equatorial plane 5 is superimposed around the crown portion 4 of the carcass 3 toroidally extending between at least a pair of the bead cores 2, and further at least one circumferential belt layer 7 containing a plurality of cords arranged substantially in parallel to the equatorial plane 5 is disposed on the slant belt layer 6.

As the cord for the circumferential belt layer 7 are used PET fiber cords, nylon fiber cords, PEN fiber cords, vinylon fiber cords or steel cords.

When the PET, nylon, PEN or vinylon fiber cord is used in the circumferential belt layer 7, if the cord has a layer twisting structure, a total denier D_T of 1000d - 6000d and a twisting coefficient N_t of not more than 0.3 in case of PET or nylon fiber, not more than 0.5 in case of PEN fiber or not more than 0.6 in case of vinylon fiber, sufficient cornering power is obtained.

Moreover, the formation of the layer twisting structure is based on the improvement of resistance to compression fatigue of the cord itself and the operability. When the total denier is less than 1000d, the cords can not physically be arranged in the circumferential belt layer, while when it exceeds 6000d, the cord becomes too thick and hence the amount of rubber used undesirably increases to bring about the increase of tire weight. If the twist constant N_t is too small, there is caused a fear of loosening the cord to degrade the operability, so that the lower limit of the twist constant is 0.1 in all of these organic fiber cords.

In case of using the PET, nylon, PEN or vinylon fiber cords in the circumferential belt layer, the cord braking-up through compression fatigue hardly occurs as compared with the conventionally used aromatic polyamide fiber cord.

Since the organic fibers such as PET, nylon, PEN and vinylon fibers are large in the work loss and are apt to generate heat, when these fiber cords are used in the belt layer, there is a possibility that they are fused to bring about tire burst as a result of a test for high-speed durability. For this end, it is favorable to prevent the fusion of these fiber cords by rendering the loss tangent ($\tan \delta$) of each of these fiber cords used in the circumferential belt layer 7 into not more than 0.3 under conditions that an initial tension is 1 kgf/cord, a strain amplitude is 0.1%, a frequency is 20 Hz and an atmosphere temperature is 25°C.

When the steel cord is used in the circumferential belt layer 7, if the steel cord has a modulus of elasticity of not less than 3000 kgf/mm² and a twisting structure of $1 \times N$ or $1 + N$, the rigidity in the circumferential direction can be

more enhanced while somewhat increasing the tire weight as compared with the case of using the above organic fiber cords, whereby the more satisfactory cornering power can be obtained.

When the modulus of elasticity is less than 3000 kgf/mm², the rigidity can not effectively be enhanced. Further, when the twisting structure is not 1 x N or 1 + N, the reductions of weight and cost can not be attained.

Moreover, the end count of steel cords in the circumferential belt layer is preferably within a range of 15-50 cords/50 mm from a viewpoint of the maintenance of circumferential rigidity and the weight reduction.

As seen from the above, the cord to be used in the circumferential belt layer 7 can properly be selected from the group consisting of PET fiber cord, nylon fiber cord, PEN fiber cord, vinylon fiber cord and steel cord in accordance with the use purpose.

On the other hand, even when the cord used in the circumferential belt layer 7 satisfies the above requirements, if the modulus of elasticity of a coating rubber for the circumferential belt layer 7 is too low, the cords are easily moved in the belt layer to cause local buckling of the cord and hence there is a fear of creating cord breaking-up. For this end, the modulus of elasticity of the coating rubber for the circumferential belt layer 7 is restricted to not less than 200 kgf/mm², whereby the cord breaking-up can be prevented.

Moreover, the circumferential belt layer is formed by spirally winding the cord around the slant belt layer, whereby the uniformity of the tire can be improved.

The number of the circumferential belt layers is preferable to be 1-2 from a viewpoint of the weight reduction.

Furthermore, sufficient tire casing strength is obtained by using steel cords or steel filaments in the slant belt layer 6. In this case, the inclination cord angle with respect to the equatorial plane 5 in the slant belt layer is within a range of 15-45° or providing sufficient in-plane shearing rigidity.

As shown in Fig. 3, a gauge t1 of rubber located between the cord of the slant belt layer 6 and the cord of an innermost circumferential belt layer 7 in the radial direction is made larger in a side end region 13 of the tire than in a central region 12 thereof in the widthwise direction at a radial section of the tire. Concretely, the rubber gauge in the side end region 13 is 2 times or more of the rubber gauge in the central region 12. On the other hand, a range L2 maintaining the rubber gauge in the central region 12 is 50-90% of a width L1 of the slant belt layer 6 centering around the equatorial plane 5. Thus, there is created so-called sandwich beam effect (T. W. Chou and F. K. Ko, "Textile Structural Composite", Elsevir, 1989) and hence the bending rigidity in the circumferential direction becomes relatively lower in the central region 12 than in the side end region 13. Consequently, the ground contacting length of the tire becomes long in the central zone of the tread and short in the shoulder region thereof to put the ground contacting shape of the tire close to a chipped round shape, whereby water existing ahead the tire during the running on wet road surface can rapidly be discharged sideward from the tire to control the occurrence of hydroplaning.

Since the total thickness T of the slant belt layer 6 and the circumferential belt layer 7 becomes small at a position corresponding to the central region 12 of the tire in the widthwise direction thereof, there may be caused a phenomenon that ruggedness corresponding to the cords in the circumferential belt layer appears in an inner peripheral surface of the tire after the vulcanization at the widthwise central region 12 (cord-exposing phenomenon). In the latter case, a gauge t2 of rubber located between the cord of an outermost circumferential belt layer 7 in the radial direction and an inner peripheral surface of a tread rubber is made larger in the central region 12 of the tire than in the side end region 13 thereof in the widthwise direction as shown in Fig. 4, whereby the total thickness T of the slant belt layer 6 and the circumferential belt layer 7 can be uniformized in the widthwise direction of the tire to prevent the cord-exposing phenomenon.

If it is required to more control the pushing out of the widthwise central region of the tire during the running at high speed, the circumferential belt layer 7 is favorable to be at least two layers in the widthwise central region 12 of the tire. As shown in Fig. 2, two or more belt layers 7-1, 7-2 having a relatively wide width may be arranged as the circumferential belt layer 7. Although the widths of the two belt layers 7-1 and 7-2 are changed in the embodiment of Fig. 2, two or more circumferential belt layers having a width approximately equal to that of the slant belt layer may be used. Alternatively, as shown in Fig. 5, the circumferential belt layer 7 may be constituted with a width-wide circumferential belt layer 7-1 covering approximately a full surface of the slant belt layer 6 and a width-narrow circumferential belt layer 7-2 covering only a central region of the width-wide circumferential belt layer 7-1. If it is required to more control the separation failure at belt end, the circumferential belt layer 7 is favorable to be at least two layers in the side end region of the tire in the widthwise direction. In this case, the full surface of the slant belt layer may be covered with two or more width-wide circumferential belt layers, or the circumferential belt layer 7 may be constituted with a width-wide circumferential belt layer 7-1 covering approximately a full surface of the slant belt layer 6 and a pair of width-narrow circumferential belt layers 7-2 covering only the side end regions of the width-wide circumferential belt layer 7-1 or width-narrow circumferential belt layers 7-2 covering only the side end regions and central region of the width-wide circumferential belt layer 7-1 (Fig. 6). In any case, the width, number and the like of the circumferential belt layer 7 may properly be changed in accordance with the use purpose.

The following examples are given in illustration of the invention and are not intended as limitations thereof.

A pneumatic radial tire to be tested has a tire size of 195/65R14 and a construction as shown in Fig. 1, which

EP 0 715 971 A2

comprises a carcass 3 toroidally extending between a pair of bead cores 2, one slant belt layer 6 superimposed about a crown portion 4 of the carcass 3 and containing a plurality of steel cords arranged at a given cord angle with respect to an equatorial plane 5 of the tire, and a circumferential belt layer 7 arranged on the slant belt layer 6 and containing a plurality of cords arranged at a cord angle of approximately 0° with respect to the equatorial plane 5. In this case, the circumferential belt layer 7 is formed by spirally winding the cord on the slant belt layer.

Moreover, the number of the circumferential belt layers 7 (at central region and side end region), the material, twisting structure, total denier, twist constant, loss tangent and end count of the cord used in the circumferential belt layer 7, the modulus of elasticity of the coating rubber for the circumferential belt layer 7, the material and inclination angle with respect to the equatorial plane 5 in the cord of the slant belt layer 6, the gauge t1 of rubber located between the cord of the slant belt layer 6 and the cord of the innermost circumferential belt layer 7 in the radial direction (at central region and side end region) and the gauge t2 of rubber located between the cord of the outermost circumferential belt layer 7 in the radial direction and the inner peripheral surface of the tread rubber (at central region and side end region) are summarized in Table 1. In Table 1, tire Nos. 1-15 are examples, and tire Nos. 16-18 are comparative examples, and tire Nos. 19-20 are conventional examples.

The other construction of the above tires is the same as in the conventional pneumatic radial tire for passenger cars.

Table 1

Tire No.	Circumferential belt layer										Cord of slant belt layer	Rubber gauge t1 (mm)		Rubber gauge t2 (mm)		
	Number of layers	Cord							Elastic modulus of coating rubber (kgf/mm ²)	Rubber gauge t1 (mm)		Rubber gauge t2 (mm)				
		central side region	material	twisting structure	total denier	twist constant	loss tangent	end count		central side region		central side region	central side region	central side region		
1	1	1	PET	layer structure	1500d/3	0.15	0.25	50	250	STEEL	40	0.08	0.5	0.7	0.2	
2	1	1	PET	layer structure	1500d/3	0.15	0.20	50	250	STEEL	40	0.08	0.5	0.7	0.2	
3	1	1	PET	layer structure	1500d/3	0.30	0.45	50	250	STEEL	40	0.08	0.5	0.7	0.2	
4	1	1	PET	layer structure	1500d/3	0.20	0.45	50	250	STEEL	40	0.08	0.5	0.7	0.2	
5	2	1	PET	layer structure	1500d/3	0.15	0.25	50	250	STEEL	40	0.08	0.5	0.7	0.2	
6	1	2	PET	layer structure	1500d/3	0.15	0.25	50	250	STEEL	40	0.08	0.5	0.7	0.2	
7	2	1	PET	layer structure	1500d/3	0.15	0.25	50	250	STEEL	40	0.08	0.5	0.7	0.2	
8	2	1	66NYLON	layer structure	1500d/3	0.09	0.18	50	250	STEEL	40	0.08	0.5	0.7	0.2	
9	1	1	STEEL	16x0.24, elastic modulus:14500 kgf/mm ²					20	250	STEEL	40	0.08	0.5	0.7	0.2
10	1	1	PET	layer structure	1500d/3	0.15	0.25	50	180	STEEL	40	0.08	0.5	0.7	0.2	
11	1	1	PET	layer structure	1500d/3	0.15	0.25	50	250	STEEL	40	0.08	0.08	0.7	0.7	
12	1	1	PET	layer structure	1500d/3	0.15	0.25	50	250	STEEL	40	0.08	0.5	0.2	0.2	
13	1	1	PET	layer structure	1500d/3	0.15	0.25	50	250	STEEL	50	0.08	0.5	0.7	0.2	
14	1	1	PEN	layer structure	1500d/2	0.25	0.21	50	250	STEEL	40	0.08	0.5	0.7	0.2	
15	1	1	PVA	layer structure	1500d/2	0.32	0.18	50	250	STEEL	40	0.08	0.5	0.7	0.2	
16	1	1	PET	layer structure	1500d/3	0.35	0.25	50	250	STEEL	40	0.08	0.5	0.7	0.2	
17	1	1	PET	layer structure	1500d/3	0.35	0.45	50	250	STEEL	40	0.08	0.5	0.7	0.2	
18	1	1	PBT	layer structure	1500d/3	0.35	0.25	50	180	STEEL	40	0.08	0.5	0.7	0.2	
19	1	1	66NYLON	layer structure	1260d/2	0.48	0.25	50	250	STEEL, two layers	±22	0.08	0.5	0.7	0.2	
20	none	none	-	-	-	-	-	-	-	STEEL, two layers	±22	0.08	0.5	0.7	0.2	

EP 0 715 971 A2

Test Method

The tests for evaluating the cornering property, high-speed durability and durability are carried out with respect to these test tires.

(1) Test for the evaluation of cornering property

The cornering property is evaluated by measuring the cornering power.

The test tire subjected to an internal pressure of 1.7 kgf/cm² is set on a drum of 3000 mm in outer diameter and trained at a speed of 30 km/h under a load defined from the tire size and internal pressure according to JATMA or JIS for 30 minutes. After the internal pressure is adjusted to 1.7 kgf/cm² under no load, the tire is run on the drum at the same speed under the same load as mentioned above while varying a slip angle with respect to the circumferential line of the drum within a range of $\pm 1^\circ$ to $\pm 4^\circ$, during which an average value of cornering force (CF) at each slip angle is measured. Then, the cornering power (CP value) is calculated by substituting these average values to the following equation:

$$CP \text{ (kgf/deg)} = [CF(\text{kgf}/1^\circ) + CF(\text{kgf}/2^\circ)/2 + CF(\text{kgf}/3^\circ)/3 + CF(\text{kgf}/4^\circ)/4] + 4$$

The test results are shown in Table 2. In this case, the CP value is represented by an index value on the basis that Conventional Example 19 is 100, in which the larger the index value, the better the cornering property.

(2) Test for the evaluation of high-speed durability

The high-speed durability is evaluated by increasing the running speed of the test tire on a drum every 30 minutes according to a test of step-speed system defined in FMVSS No. 109 until the occurrence of tire trouble to measure a speed (km/h) at the occurrence of tire trouble. The test results are also shown in Table 2. The high-speed durability is represented by an index value on the basis that Conventional Example 19 is 100. The larger the index value, the better the high-speed durability.

(3) Test for the evaluation of durability.

The test tire subjected to an inner pressure of 1.0 kgf/cm² is run on a drum at a slip angle of 8° under a maximum load defined in JATMA for 16 hours, and thereafter the tire is cut to measure the presence or absence of cord breaking-up in the circumferential belt layer, whereby the durability is evaluated. The test results are also shown in Table 2, in which the occurrence of cord breaking-up is described as "presence" and no occurrence is described as "absence".

Table 2

	Tire No.	Test results		
		Cornering property	High-speed durability	Durability
Example	1	108	115	absence
	2	108	117	absence
	3	101	90	absence
	4	105	95	absence
	5	108	115	absence
	6	110	115	absence
	7	108	115	absence
	8	102	112	absence
	9	121	120	absence
	10	108	110	presence
	11	108	115	absence
	12	108	105	absence
	13	102	100	absence
	14	104	105	absence
	15	109	110	absence
Comparative Example	16	95	95	absence
	17	95	90	absence
	18	94	93	presence
Conventional Example	19	100	100	absence
	20	97	90	absence

As seen from the test results of Table 2, the tire Nos. 1-15 of the examples are excellent in the cornering property as compared with the tire No. 19 of the conventional example. Furthermore, the tires of the examples other than the tire Nos. 3, 4 and 10 are excellent in the durability and high-speed durability. Moreover, the tire Nos. 3 and 4, in which the loss tangent of the cord in the circumferential belt layer is somewhat outside the preferable range, are somewhat poor in the high-speed durability as compared with the tire No. 19 of the conventional example, while the occurrence of cord breaking-up is observed in the tire No. 10 in which the modulus of elasticity of the coating rubber for the circumferential belt layer is somewhat smaller than the preferable range.

Moreover, the cornering property is relatively poor in the tire No. 13 in which the inclination cord angle of the slant belt layer is somewhat larger than the preferable range as compared with the tire No. 1.

In the tire Nos. 16-18 of the comparative examples, the twist constant of the cord in the circumferential belt layer is larger than the range defined in the invention, so that the cornering property is poor as compared with the tire Nos. 1-15.

The tire No. 20 of the conventional example is poor in the cornering property and high-speed durability as compared with the tire Nos. 1-15, while the tire No. 19 of the conventional example has a belt comprised of cross belt layers and circumferential belt layer and is fairly large in the tire weight as compared with the tire No. 1.

For the reference, the drainage property and cord-exposing phenomenon are measured with respect to these test tires. As a result, the drainage property is somewhat poor in the tire No. 11 and the occurrence of cord exposing phenomenon is observed in the tire No. 12 among the tire Nos. 1-15 of the examples, while the tire Nos. 1-10 and 13-15 are good in the drainage property and have no cord exposing phenomenon.

According to the invention, the rationalized PET, nylon, PEN or vinylon fiber cords or high-strength steel cords as previously mentioned are used in the circumferential belt layer, so that it is possible to provide pneumatic radial tires for use in the general-purpose passenger cars having improved cornering property, satisfactory durability and/or high-speed durability and light weight.

Claims

1. A pneumatic radial tire comprising a carcass toroidally extending between at least a pair of bead cores and a belt superimposed on a crown portion of the carcass and comprised of one slant belt layer containing a plurality of cords or filaments arranged at a given inclination angle with respect to an equatorial plane of the tire and at least one circumferential belt layer laminated on the slant belt layer and containing a plurality of cords arranged substantially in parallel to the equatorial plane, an improvement wherein the cord used in the circumferential belt layer is made from polyethylene terephthalate or nylon fiber and has a layer twisting structure and a total denier D_T of 1000d-6000d and a twist constant N_t satisfying $N_t = T \times (0.139 \times D_T/2 \times 1/\rho)^{1/2} \times 10^{-3} \leq 0.3$ wherein T is a twisting number (twist turns/10 cm) and ρ is a specific gravity.
2. A pneumatic radial tire comprising a carcass toroidally extending between at least a pair of bead cores and a belt superimposed on a crown portion of the carcass and comprised of one slant belt layer containing a plurality of cords or filaments arranged at a given inclination angle with respect to an equatorial plane of the tire and at least one circumferential belt layer laminated on the slant belt layer and containing a plurality of cords arranged substantially in parallel to the equatorial plane, an improvement wherein the cord used in the circumferential belt layer is made from polyethylene naphthalate fiber and has a layer twisting structure and a total denier D_T of 1000d-6000d and a twist constant N_t satisfying $N_t = T \times (0.139 \times D_T/2 \times 1/\rho)^{1/2} \times 10^{-3} \leq 0.5$ wherein T is a twisting number (twist turns/10 cm) and ρ is a specific gravity.
3. A pneumatic radial tire comprising a carcass toroidally extending between at least a pair of bead cores and a belt superimposed on a crown portion of the carcass and comprised of one slant belt layer containing a plurality of cords or filaments arranged at a given inclination angle with respect to an equatorial plane of the tire and at least one circumferential belt layer laminated on the slant belt layer and containing a plurality of cords arranged substantially in parallel to the equatorial plane, an improvement wherein the cord used in the circumferential belt layer is made from vinylon fiber and has a layer twisting structure and a total denier D_T of 1000d-6000d and a twist constant N_t satisfying $N_t = T \times (0.139 \times D_T/2 \times 1/\rho)^{1/2} \times 10^{-3} \leq 0.6$ wherein T is a twisting number (twist turns/10 cm) and ρ is a specific gravity.
4. A pneumatic radial tire according to claim 1, 2 or 3, wherein the cord for the circumferential belt layer has a loss tangent ($\tan \delta$) of not more than 0.3 under conditions that an initial tension is 1 kgf/cord, a strain amplitude is 0.1%, a frequency is 20 Hz and an atmosphere temperature is 25°C.
5. A pneumatic radial tire comprising a carcass toroidally extending between at least a pair of bead cores and a belt superimposed on a crown portion of the carcass and comprised of one slant belt layer containing a plurality of cords or filaments arranged at a given inclination angle with respect to an equatorial plane of the tire and at least one circumferential belt layer laminated on the slant belt layer and containing a plurality of cords arranged substantially in parallel to the equatorial plane, an improvement wherein the cord used in the circumferential belt layer is a steel cord having a modulus of elasticity of not less than 3000 kgf/mm² and a twisting structure of $1 \times N$ or $1 + N$ in which N is the number of steel filaments.
6. A pneumatic radial tire according to claim 1, 2, 3 or 5, wherein a coating rubber for the circumferential belt layer has a modulus of elasticity of not less than 200 kgf/mm².
7. A pneumatic radial tire according to claim 1, 2, 3 or 5, wherein the cord for the circumferential belt layer is spirally wound around the slant belt layer.
8. A pneumatic radial tire according to claim 1, 2, 3 or 5, wherein the slant belt layer contains steel cords or steel filaments therein.
9. A pneumatic radial tire according to claim 1, 2, 3 or 5, wherein the slant belt layer has a cord inclination angle of 15-45° with respect to the equatorial plane.
10. A pneumatic radial tire according to claim 1, 2, 3 or 5, wherein a gauge (t1) of rubber located between the cord of the slant belt layer and the cord of an innermost circumferential belt layer in a radial direction of the tire is made larger in a side end region of the tire than in a central region thereof in the widthwise direction at a radial section of the tire.

EP 0 715 971 A2

11. A pneumatic radial tire according to claim 1, 2, 3 or 5, wherein a gauge (t2) of rubber located between the cord of an outermost circumferential belt layer in the radial direction and an inner periphery of a tread rubber is made larger in the central region of the tire than in the side end region thereof in the widthwise direction at a radial section of the tire.

5

12. A pneumatic radial tire according to claim 1, 2, 3 or 5, wherein at least two circumferential belt layers are disposed in the central region in the widthwise direction of the tire.

13. A pneumatic radial tire according to claim 1, 2, 3 or 5, wherein at least two circumferential belt layers are disposed in the side end region in the widthwise direction of the tire.

10

15

20

25

30

35

40

45

50

55

FIG. 1

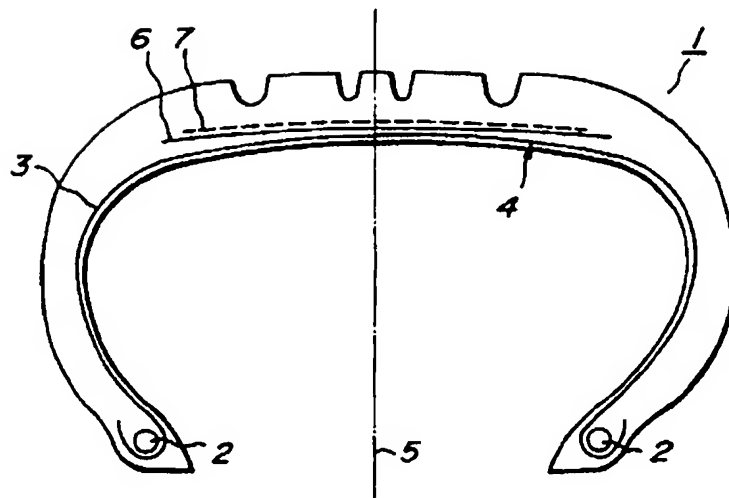


FIG. 2

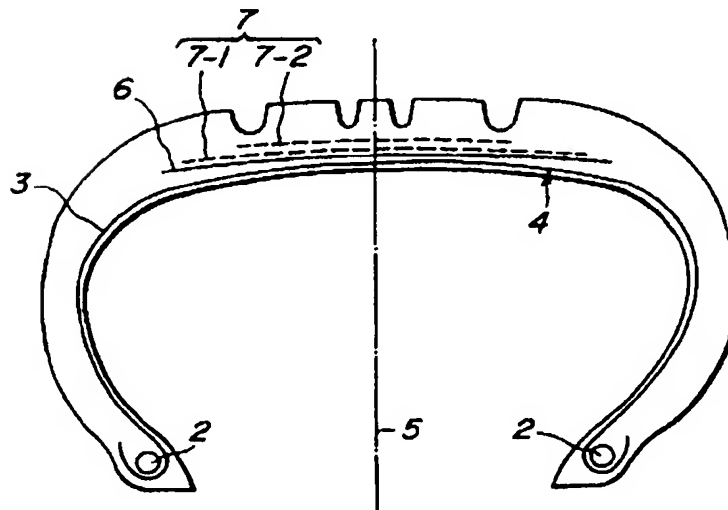


FIG.3

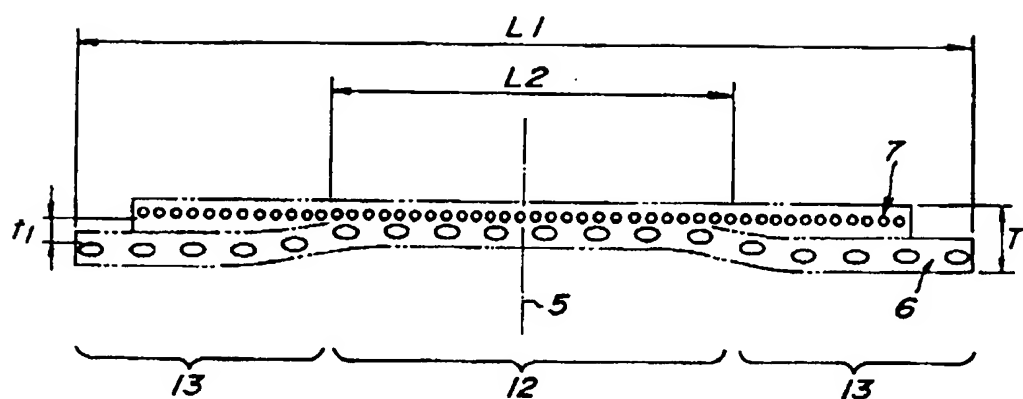


FIG.4

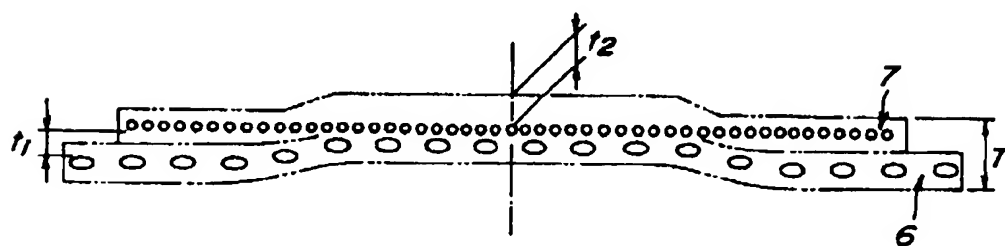


FIG. 5

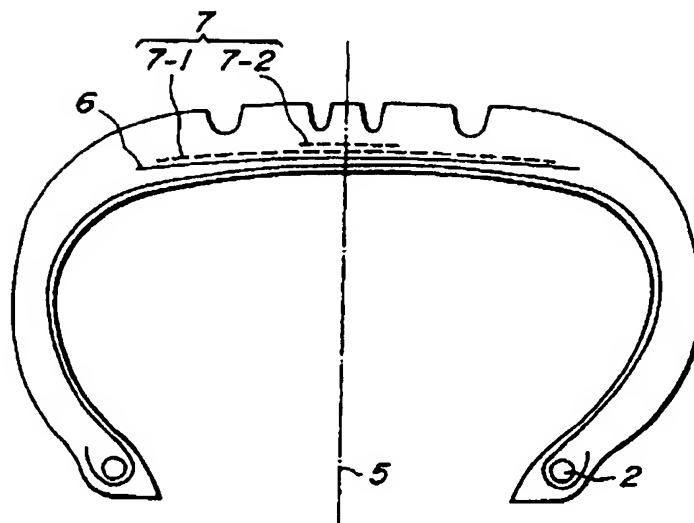


FIG. 6

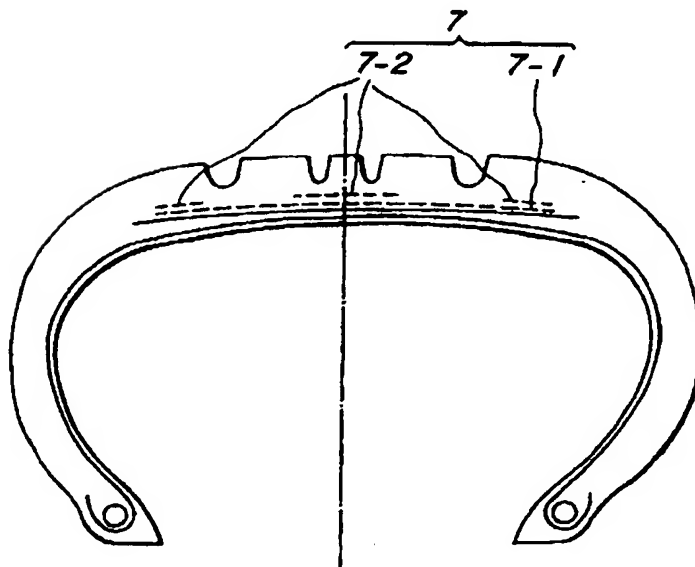


FIG. 7a


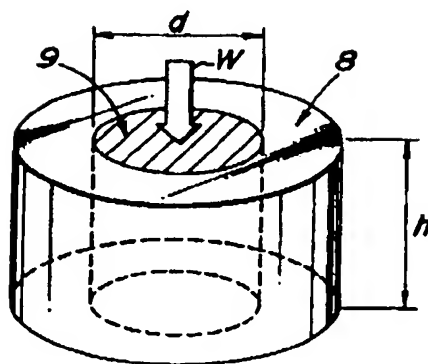


FIG. 7b



(19)

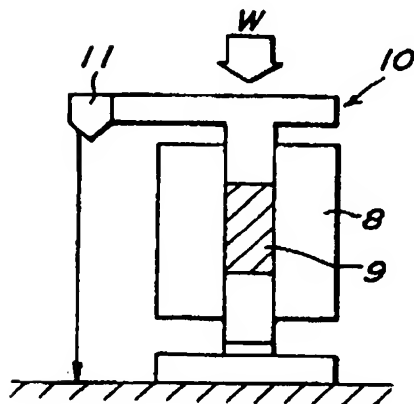

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 715 971 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
04.12.1996 Bulletin 1996/49

(51) Int Cl.⁶: B60C 9/22, B60C 9/20

(43) Date of publication A2:
12.06.1996 Bulletin 1996/24

(21) Application number: 95307153.7

(22) Date of filing: 10.10.1995

(84) Designated Contracting States:
DE ES FR GB IT

(30) Priority: 09.12.1994 JP 306242/94
09.12.1994 JP 306243/94
23.03.1995 JP 63881/95
23.03.1995 JP 63882/95
25.09.1995 JP 245989/95

(71) Applicant: Bridgestone Corporation
Tokyo (JP)

(72) Inventors:
• Kohno, Yoshihide
Kodaira City, Tokyo (JP)

• Yamanaka, Eiichi
Kodaira City, Tokyo (JP)
• Kobayashi, Toshinobu
Kodaira City, Tokyo (JP)
• Sato, Takayuki
Wako City, Saitama Pref. (JP)


(74) Representative: Whalley, Kevin
MARKS & CLERK,
57-60 Lincoln's Inn Fields
London WC2A 3LS (GB)

(54) **Pneumatic radial tires**

(57) A pneumatic radial tire (1) for passenger cars has good cornering property and either or both of durability and high-speed durability and comprises a circum-

ferential belt layer (7) in addition to a slant belt layer (6), in which specified PET, nylon, PEN or vinylon fiber cords or steel cords as particularly defined are used in the circumferential belt layer.

FIG. 1

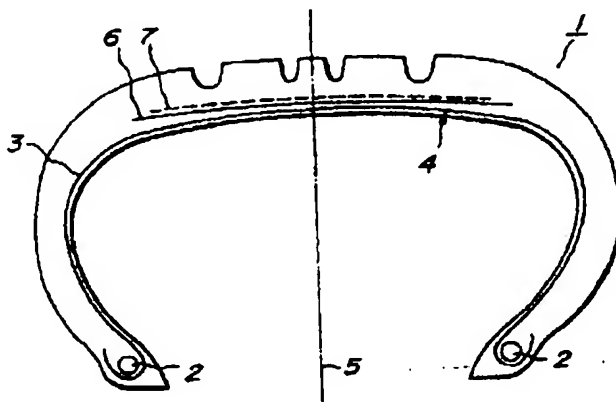

EP 0 715 971 A3

EP 0 715 971 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 95 30 7153

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
P,X	EP-A-0 661 180 (SUMITOMO RUBBER IND) 5 July 1995 * claims 1,2; table 1 *	5	B60C9/22 B60C9/20
P,X	EP-A-0 629 518 (BRIDGESTONE CORP) 21 December 1994 * claims; figures; tables *	1,12,13	
X	& WO-A-94 14625 (...)	1,12,13	
X	AU-B-533 210 (THE OLYMPIC TIRE&RUBBER CO.) 10 November 1983 * page 6, line 8 - page 7, line 5; claims; figure *	1,8,9,12,13	
X	PATENT ABSTRACTS OF JAPAN vol. 018, no. 637 (M-1716), 5 December 1994 & JP-A-06 247105 (BRIDGESTONE CORP), 6 September 1994, * abstract *	1,7	
X	PATENT ABSTRACTS OF JAPAN vol. 018, no. 065 (M-1554), 3 February 1994 & JP-A-05 286304 (BRIDGESTONE CORP), 2 November 1993, * abstract *	1	TECHNICAL FIELDS SEARCHED (Int.Cl.6) B60C
X	US-A-4 889 174 (OSHIMA KAZUO ET AL) 26 December 1989 * claims; examples; tables *	3,6	
X	FR-A-2 443 342 (UNIROYAL ENGLEBERT GMBH) 4 July 1980 * page 7, line 23 - page 8, line 19; claims; figures *	4 1	
		-/--	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 8 October 1996	Examiner Baradat, J-L
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EP 0 FORM 150 (03.91) (P/C/01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 95 30 7153

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	FR-A-2 244 634 (TEIJIN LTD) 18 April 1975 * claims; table 6 *	2	
A	EP-A-0 360 538 (BRIDGESTONE CORP) 28 March 1990 * page 4 *	5	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 8 October 1996	Examiner Baradat, J-L
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application I : document cited for other reasons A : number of the same patent family, corresponding document	

EPO FORM 1831 (04/91) (PCT)